
Thermal Bridges in Steel Framing Components

Developments in Mitigation of Thermal Bridges Generated by Light Gage Steel Framing



Peter Engelmann, PhD; Jan Kosny, PhD; Bryan Urban

NSB2011 Tampere, May 30th 2011

Agenda

- why using steel framing?
- ways of reducing thermal bridging – an overview
- numerical analysis of different wall assemblies
- conclusion - outlook

Metal Framing – Problems and Solutions

advantages:

- dimensionally stable
- immune to termites/insects
- good recyclability

disadvantages:


- steel is a very good heat conductor
- thermal bridges




Metal Framing – Problems and Solutions

known technologies to reduce thermal bridging:

- reducing the contact area between metal stud and wall material
reduction of contact area up to 95%
increase in overall U-value 9 to 15%

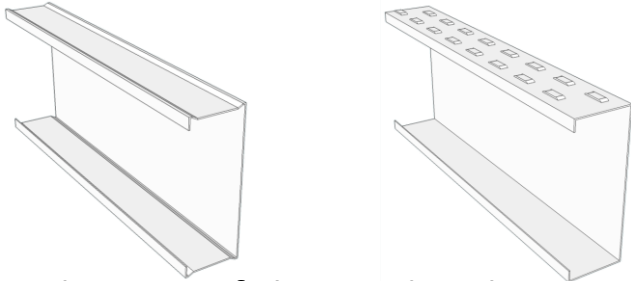

- reduction of the stud web area
increase in overall U-value up to 36%

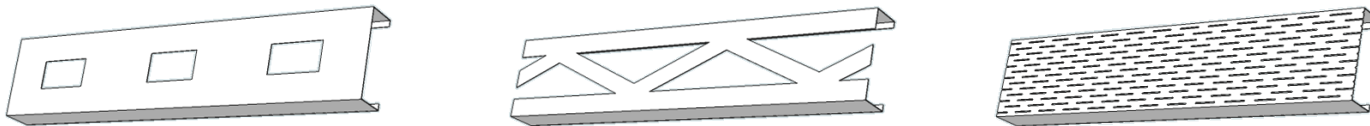


- place low conducting material on the flanges - where heat flow is most critical
- replacing the steel web with a less conductive material

Metal Framing – Problems and Solutions


known technologies to reduce thermal bridging:

- enhanced constructions: spacers and/or double-stud-walls
performance of wood-stud walls achievable
but: construction more complex, thus more expensive

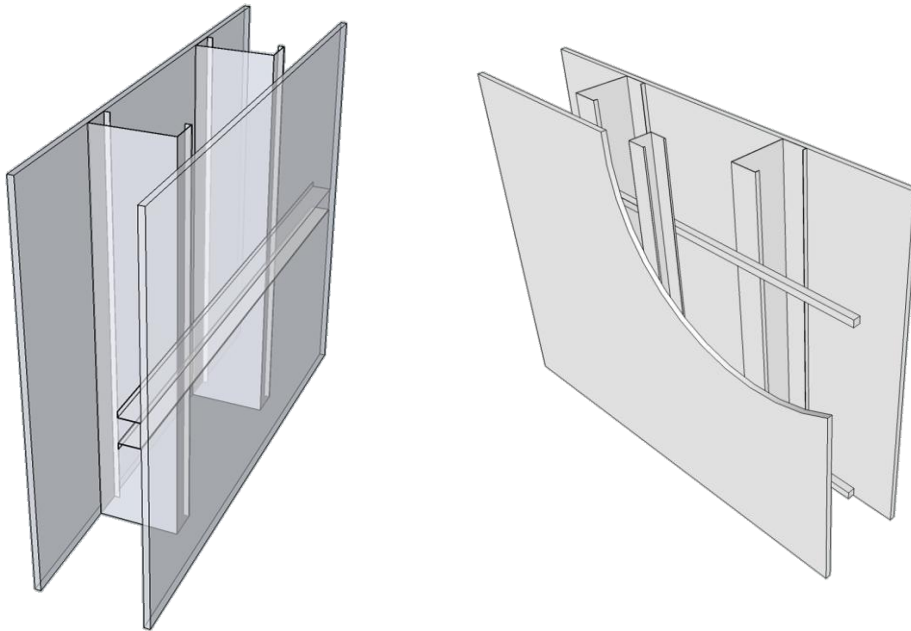


numerical analysis of different wall assemblies

example A) metal spacer, variation of conductivity of insulation material in the cavities

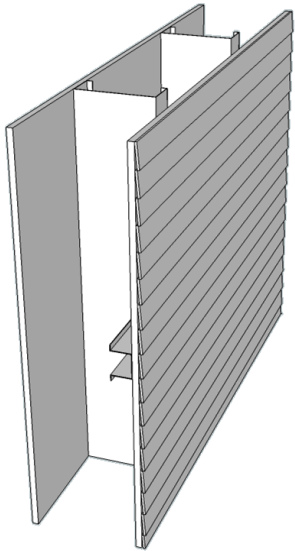


	λ fill [W/mK]	U Wall [W/m ² K]
1	0.048	0.60
2	0.042	0.55
3	0.036	0.51
4	0.029	0.45
5	0.024	0.41
6	0.021	0.38

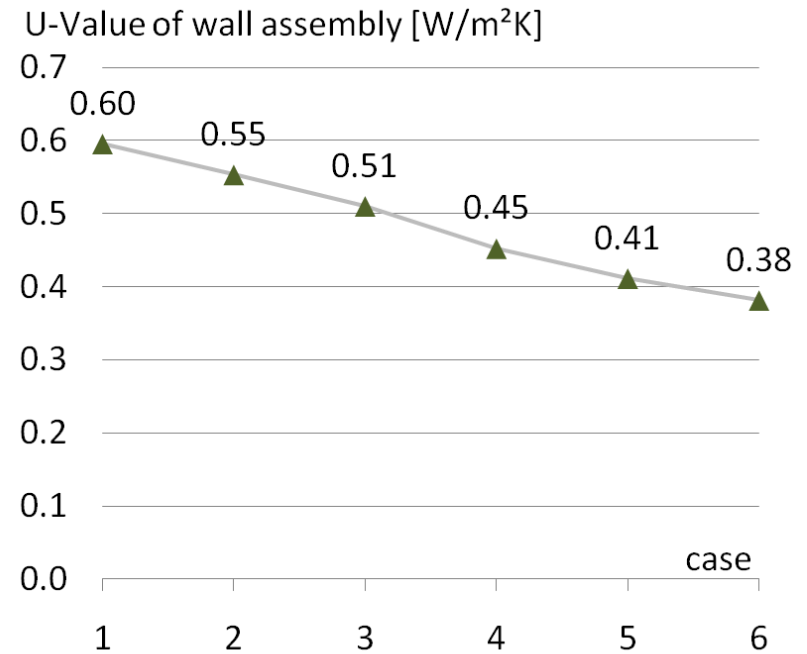


numerical analysis of different wall assemblies

example A) metal spacer, variation of conductivity of insulation material in the cavities

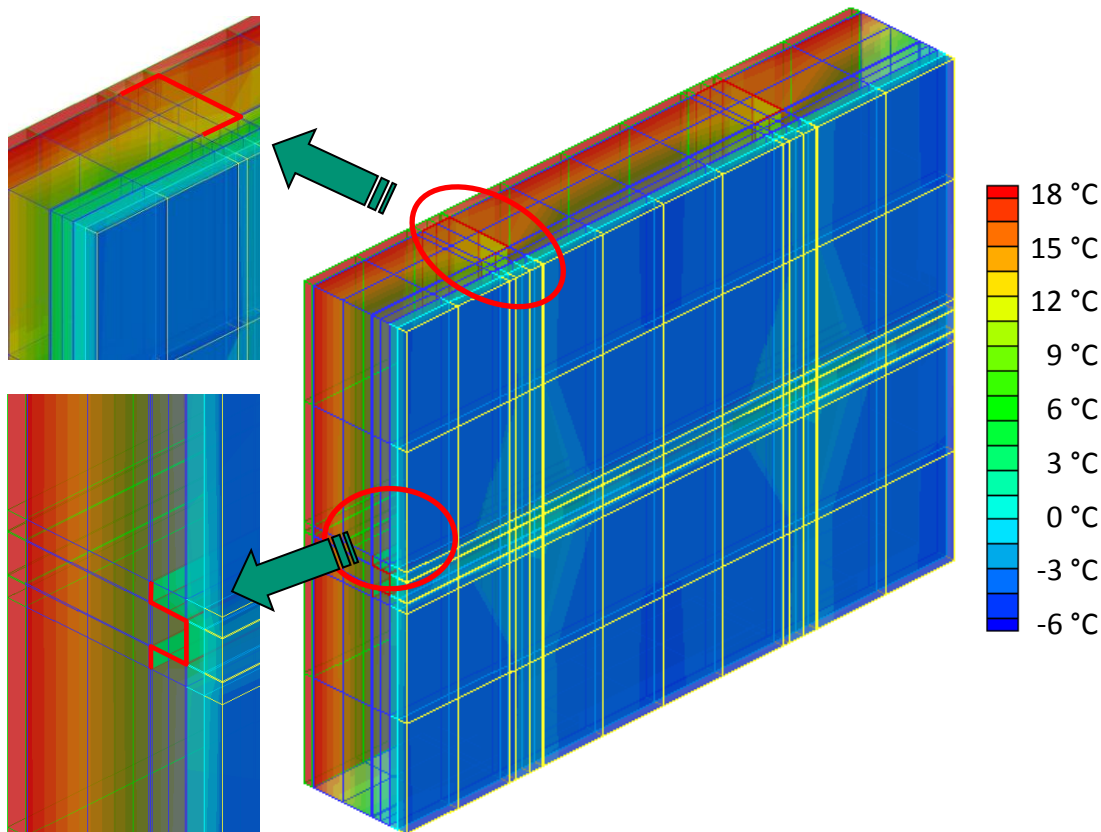


numerical analysis of different wall assemblies


example B) and C) exterior insulation with foam (2.5 and 10.2 cm), variation of λ_{foam}

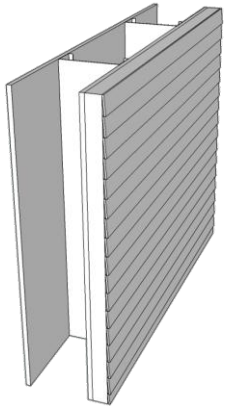

	λ sheeting [W/mK]	U Wall [W/m ² K]
1	0.036	0.46
2	0.029	0.42
3	0.024	0.39
4	0.021	0.36

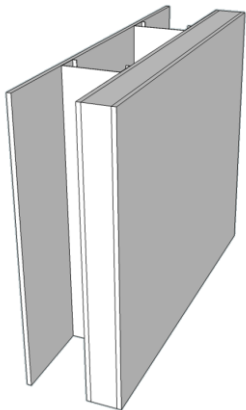


	λ sheeting [W/mK]	U Wall [W/m ² K]
1	0.036	0.24
2	0.029	0.20
3	0.024	0.18
4	0.021	0.16

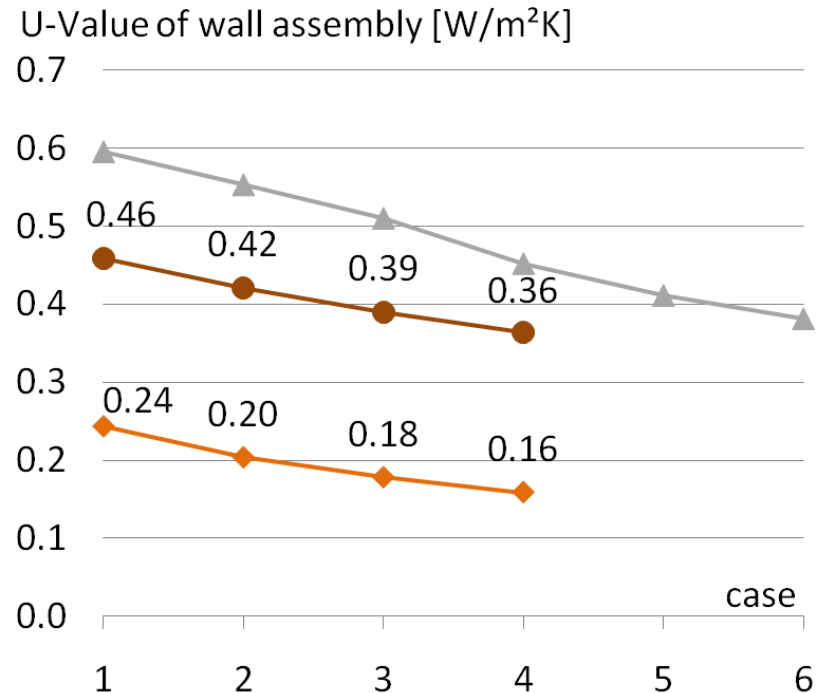


numerical analysis of different wall assemblies


example D) and E) using “high tech” materials aerogel and VIP

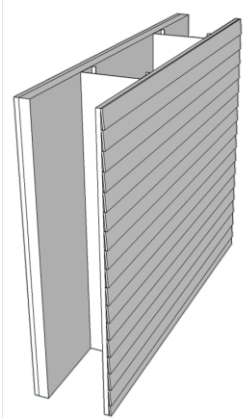

	λ sheeting [W/mK]	U Wall [W/m ² K]
1	0.014 (1.27 cm)	0.41
2	0.014 (2.54 cm)	0.29

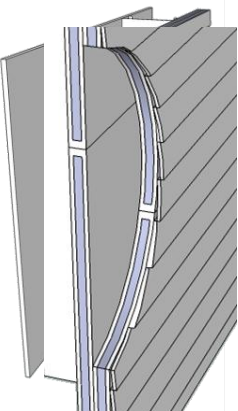


	λ sheeting [W/mK]	U Wall [W/m ² K]
1	0.003	0.06

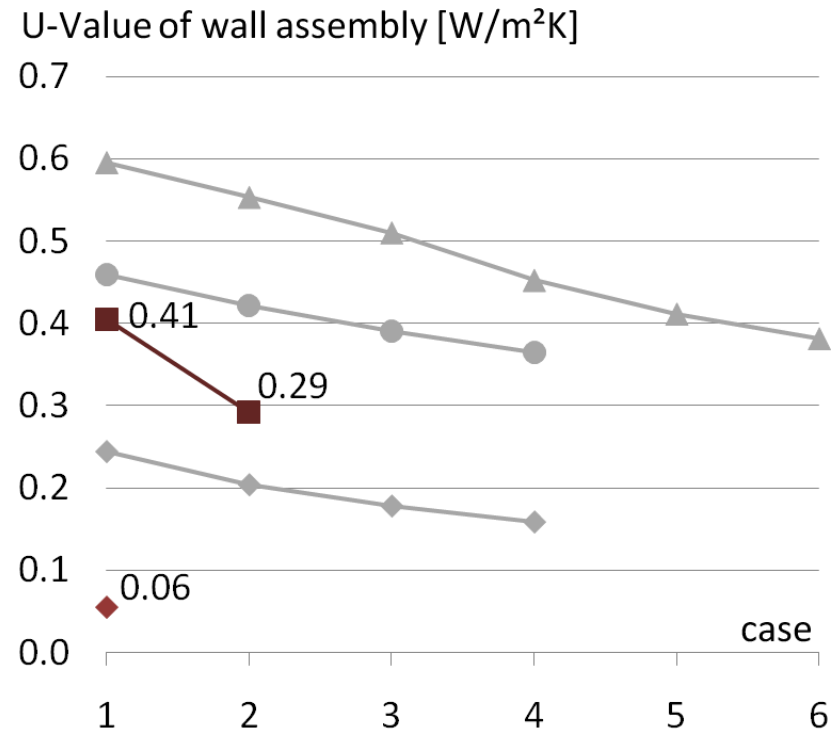

numerical analysis of different wall assemblies

example E) two layers foam covered VIP

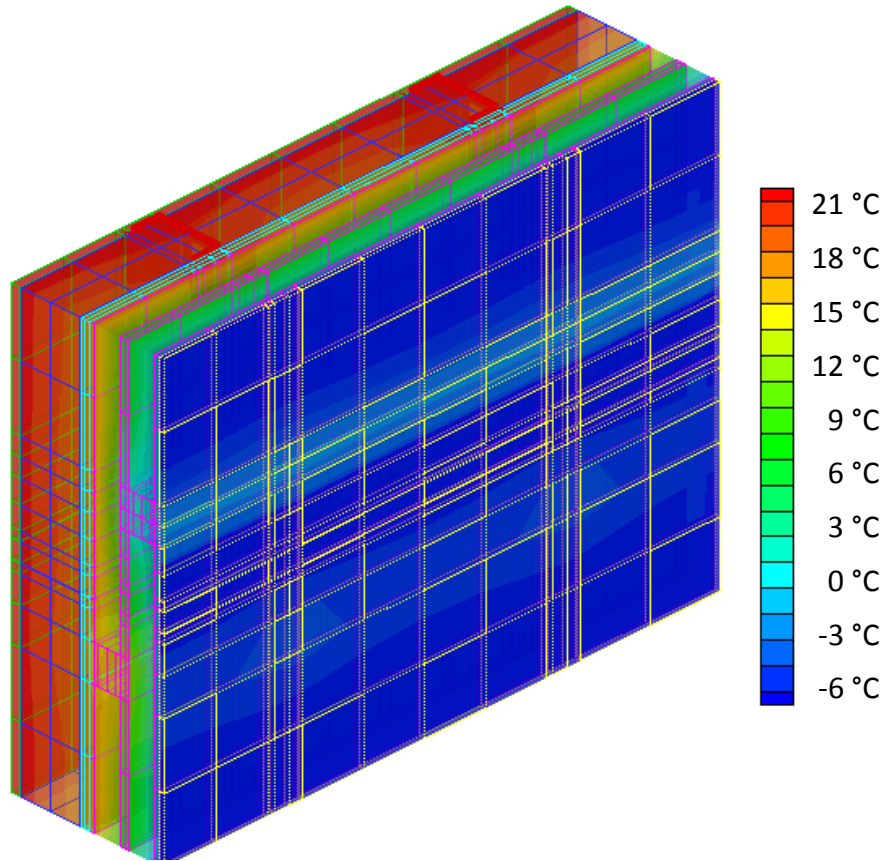



By using materials with very high thermal resistivity the influence of the metal studs is nearly insignificant.

This is an interesting option, if the amount of space is limited, for example for retrofits.

Conclusions and Outlook


wood vs. metal studs using EIFS

U-Value of wall assembly [W/m²K]

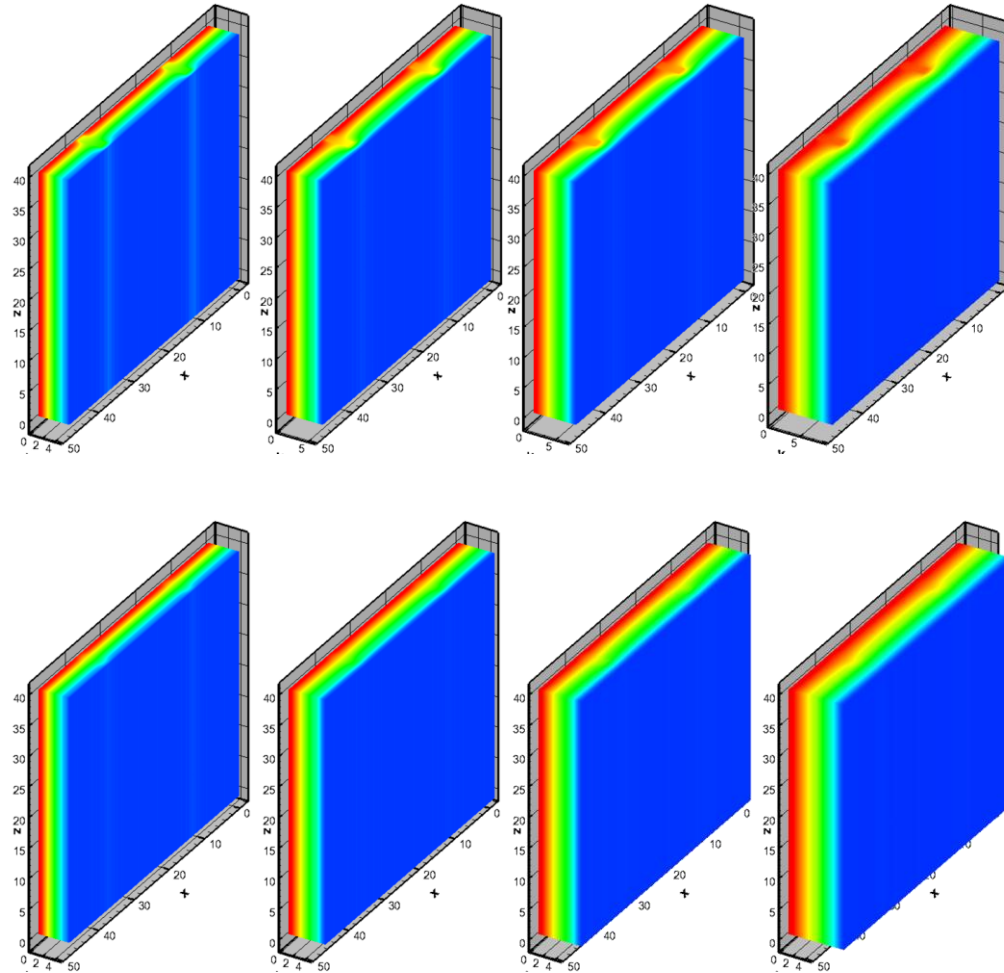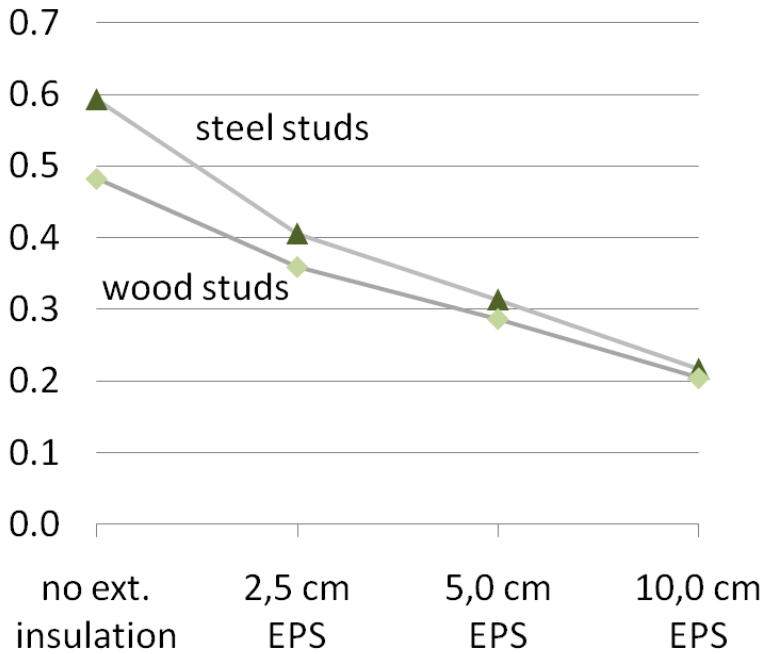

Conclusions and Outlook

metal studs can sharply reduce a wall's effective U-value, due to thermal bridging with increasing amount of thermal insulation on the outside, these effects decrease and low U values can be achieved

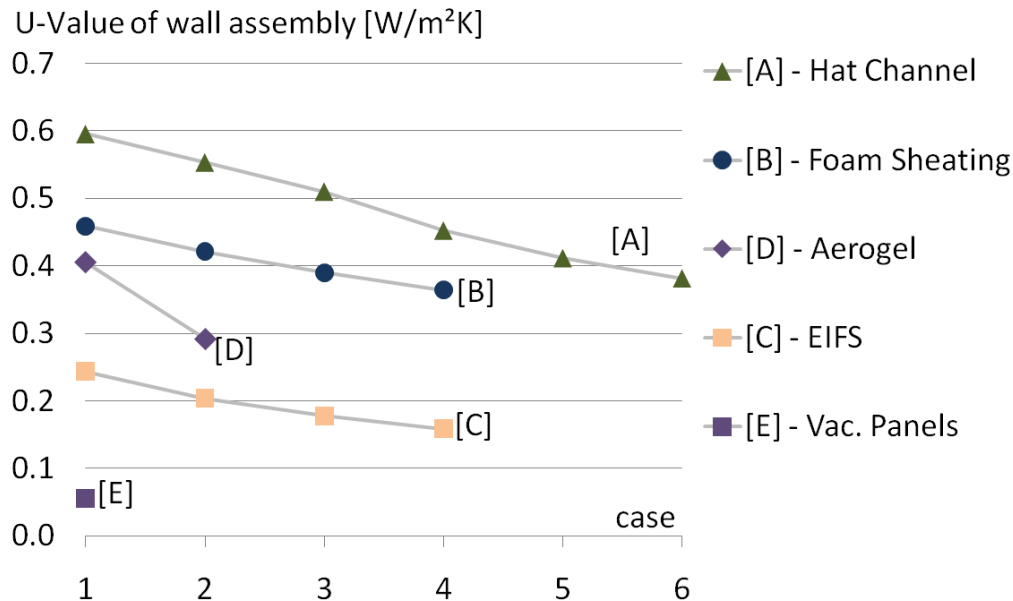

high-end materials, as aerogel and VIP, can be seen as an outlook: as soon as they are available on economically acceptable scale, they are solutions if the amount of space is limited or installation of exterior insulation is prohibited

thank you!

www.cse.fraunhofer.org

pengelmann@fraunhofer.org

jkosny@fraunhofer.org

burban@fraunhofer.org